

DESCRIPTION

AX-100SM1315P Ethernet media converter can replace media converter with network management capability to greatly reduce the system cost. It can interconvert electrical signals of 10Base-T and 100Base-TX twisted pairs with optical signals of 100Base-FX.

It extends the network transmission distance from 100m via copper cables to 40km via fiber optical cable. It enables the data to transmit in two different mediums of electrical and optical networks either by the technology of data link L2 store-and-forward or by the one of PHY L1 cut-through. It supports transmission in single mode single fiber.



FEATURES


- 10/100Mbps auto-sensed and facilitating network upgrade
- Built-in efficient switching core to implement flow control and reduce broadcast packets
- Support auto-sensing, full-duplex and half-duplex operation
- Support auto-sense of MDI/MDI-X, facilitating system commissioning and installation
- Support half /full-duplex of FX
- Support 10/100Mbps store-and-forward and 100Mbps cut-through transmission
- Support the transmission of 100Base-Fx or STM-1, compatible with other devices
- Support low-time lag transmission
- Support the transmission of extra-long packets up to 1600 bytes
- Extremely low power consumption (less than 2W), reliable and stable performance
- Options in single mode in single fiber

SPECIFICATIONS

Data Rate (Mbps)	10/100
Standard	IEEE802.3 10Base-T Ethernet, IEEE802.3u, 100Base-TX/FX Fast Ethernet and IEEE802.3x Flow Control
Operating Wavelength (nm)	1310/1550
Transmission Distance	Single fiber single mode: 20 or 40 km Category-5 twisted pairs: 100m
Port	One RJ45 port: Connecting STP/UTP category-5 twisted pairs, EIA568A/B One optical port: Single mode Single fiber: SC (9/125μm)
Operation Mode	Store and Forward mode or Cut-Through mode
Buffer	Built in 128Kb RAM for data buffer
Flow Control	Full duplex: flow control Half duplex: back pressure
BER	<10 ⁻⁹
MTBF	100,000 hours
LED Indicator	POWER (power supply), FX LINK/ACT (optical link action) FDX (full duplex), TX LINK/ACT (TP cable link/action) TX 100 (TP cable rate 100M), FX100 (fiber cable rate 100M)
Power Supply	External: AC90~264V input, 5V1A output
Power Consumption	<40W (the chassis at full load), <2W
Operating Temperature (°C)	-10 ~ 55
Operating Humidity (%)	5 ~ 90
Storage Temperature (°C)	-40 ~ 70
Storage Humidity (%)	5 ~ 90 non-condensing
Dimensions (mm)	71(W) x 94(D) x 26(H) (external power supply)

Note : Specifications are subject to change without notice

APPLICATIONS

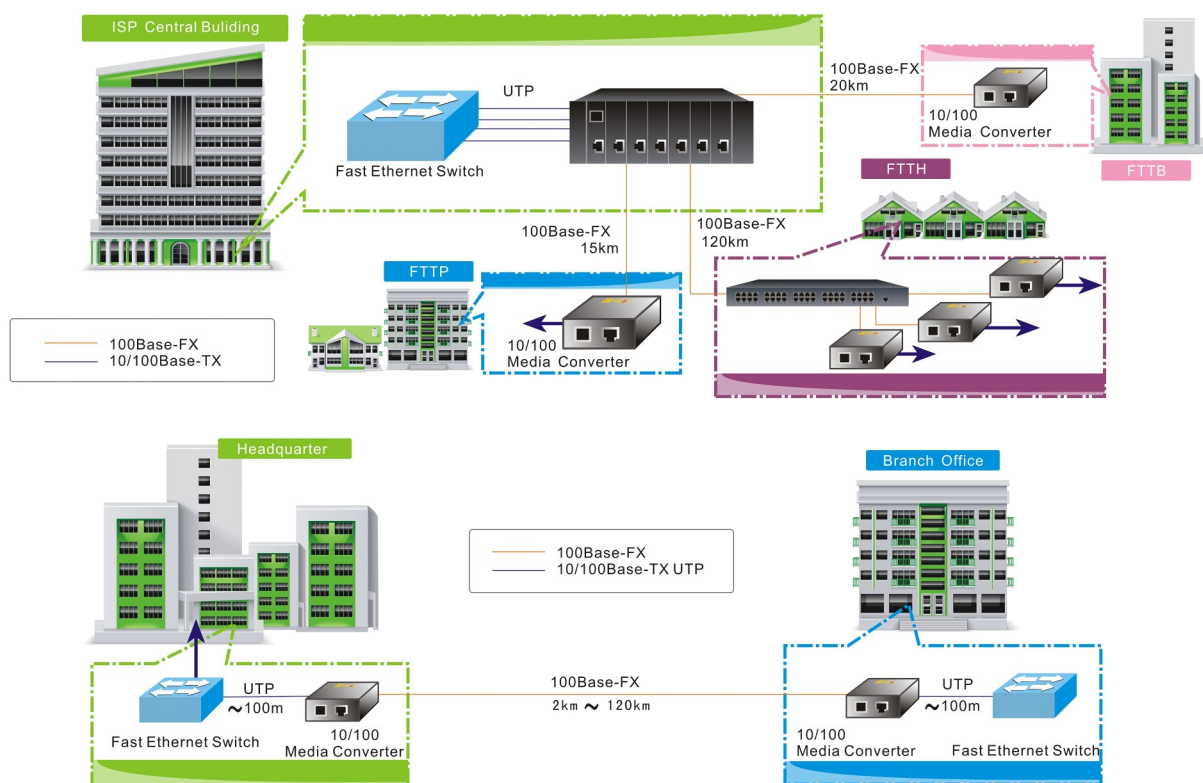

ORDERING INFORMATION

Part No	Description
AX-100SM1315P-20	Media converter, 10/100M, Single mode, Single fiber, 20km, SC connector, power adaptor 220VAC, standalone, 1310/1550nm, in pair
AX-100SM1315P-40	Media converter, 10/100M, Single mode, Single fiber, 40km, SC connector, power adaptor 220VAC, standalone, 1310/1550nm, in pair