


Patchcord/optical connector

SWK™ connector

We provide the highest capacity of required cabling under many industry standards. The SWK connector allows you to connect 96(or 144) fibers to patch panel at one time without cleaning.

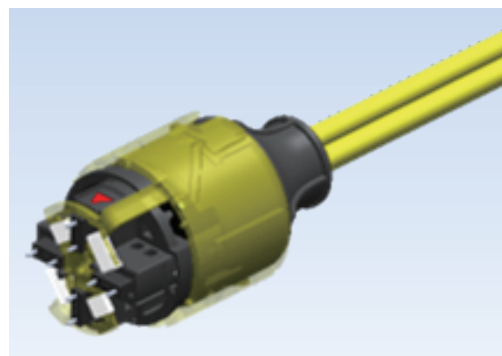


*Patent registered (US 10, 527, 803, US 10, 768, 376)

Features

- » Self cleaning function
- » High density
- » Low insertion loss
- » Easy installation


Self cleaning

- The self-cleaning Shield Shroud reduces debris and contaminants up to 98.99%.

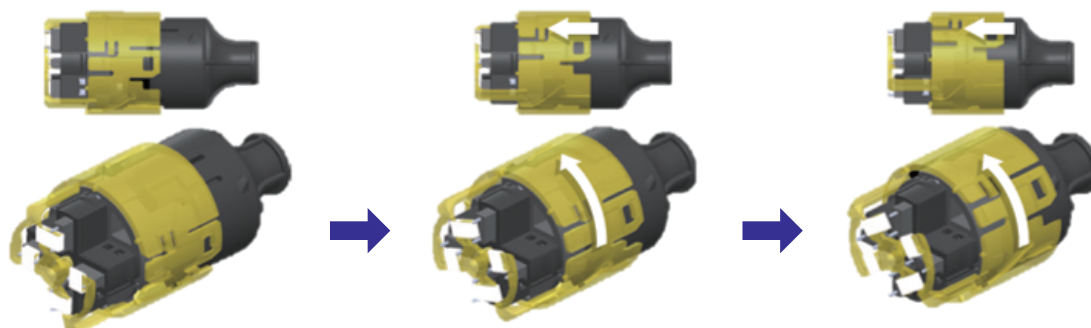


High density

- Using 4 x 24MT - 96f strand
- Using 4 x 36MT - 144f strand

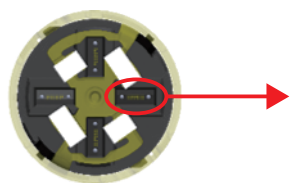

End face of
SWK connector

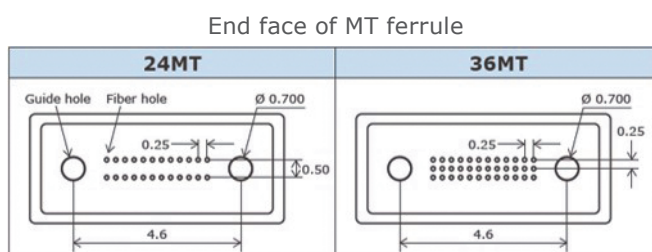

Telcordia
GR-1435-CORE Issue 2
compliant

Specification

Description	Single Mode (96f strand)	Single Mode (144f strand)
Insertion Loss (Max)	≤0.35dB	≤0.5dB
Return Loss	>55dB	>55dB
Operating Temperature	-40°C ~ +75°C	

• SWK is a trademark or registered trademark of Cheng, Steve.