


Patchcord/optical connector

# FlexULC™ Pro Patchcords

We provide the highest quality of required cabling under many industry standards. FlexULC Pro duplex LCs with more variety of features are available.

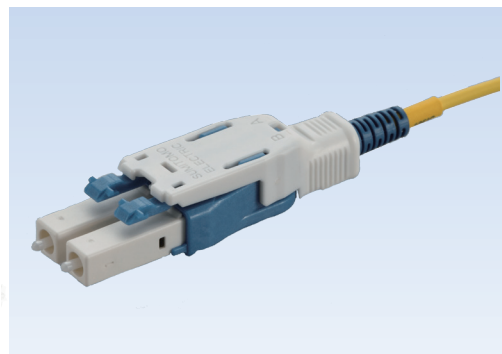


\*Patent pending


## Features

- >> Low profile body
- >> Easy polarity change
- >> Push-Pull grip
- >> High density


**Short body, Telcordia GR-3266-CORE compliant**

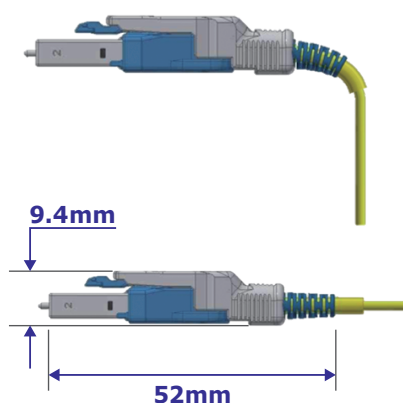


**High density cabling**

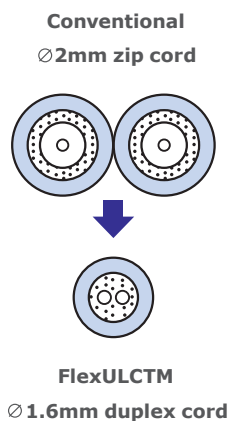

**Push-Pull tab  
Easy access, No tool**

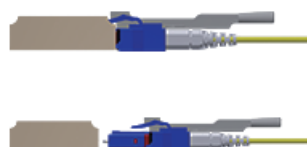

**Polarity changeable  
without tools**

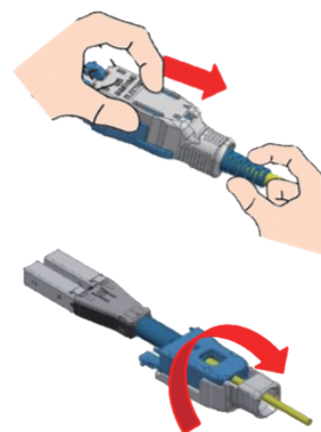

## Specification

Description	Single Mode (Standard Loss)	Single Mode (Low Loss)	Multi Mode (Low Loss)
Insertion Loss (Max)	≤0.5dB	≤0.2dB	≤0.3dB
Return Loss	>55dB	>55dB	>25dB
Operating Temperature	-40°C ~ +75°C		